


# CM3-Ethernet

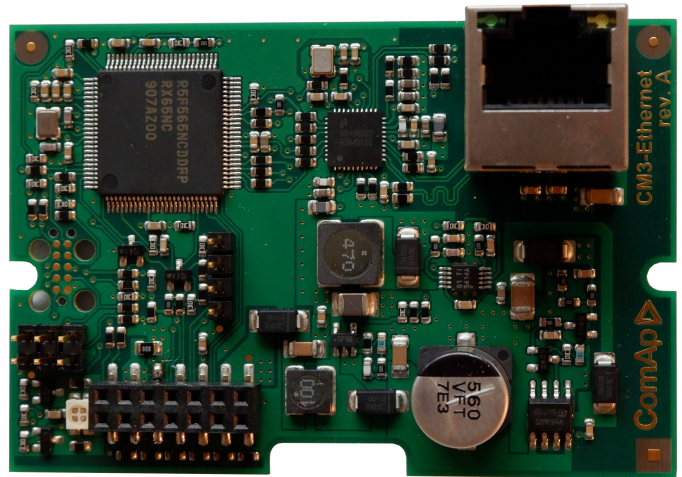

Order code: CM3ETHERXBX

## Internet / Ethernet plug-in communication module

# Datasheet


### Product description

- > Internet connection via Ethernet network

### Key features

- > Wired Internet connection via Ethernet port
- > AirGate 2 support
- > WebSupervisor support
- > Active e-mails
- > Modbus, SNMP protocols for local monitoring

### Application overview

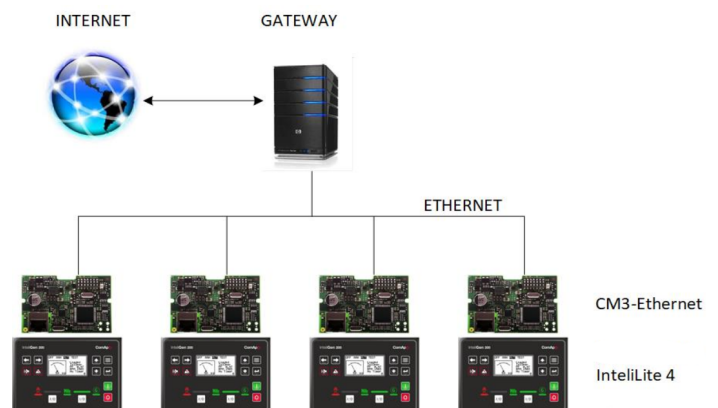

# Technical data

## General

Width × Height × Depth	73.8 × 50.3 × 21
Weight	~30 g
Power supply	8-36 V DC
Power consumption	1 W
Peak power consumption	2 W
Operating temperature	-40 °C to +70 °C
Storage temperature	-40 °C to +80 °C

## Ethernet port

100 Mbit/s, full duplex
RJ45 socket

## Certificates and standards

<ul style="list-style-type: none"><li>&gt; EN 61000-6-2</li><li>&gt; EN 61000-6-4</li><li>&gt; EN 60068-2-1, EN 60068-2-2</li><li>&gt; EN 60068-2-6 ed.2:2008</li><li>&gt; EN 60068-2-27 ed.2:2010</li><li>&gt; EN 60068-2-30:2005 25/55°C, RH 95%, 48hours</li></ul>	
---	---



E-mail: [info@comap-control.com](mailto:info@comap-control.com)  
Web: [www.comap-control.com](http://www.comap-control.com)

